

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10/509644


(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/083781 A1

- (51) International Patent Classification⁷: G06T 15/00, G09B 23/28, A61B 19/00
- (21) International Application Number: PCT/IB03/01216
- (22) International Filing Date: 26 March 2003 (26.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 02076296.9 29 March 2002 (29.03.2002) EP
- (71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LOBREGT, Steven [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: COHEN, Julius, S.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD, SYSTEM AND COMPUTER PROGRAM FOR STEREOSCOPIC VIEWING OF 3D MEDICAL IMAGES

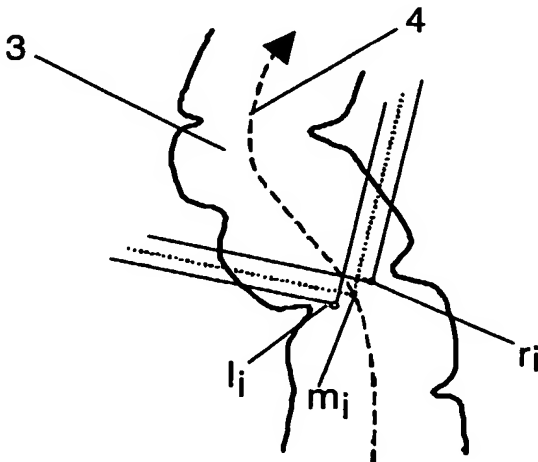

(57) Abstract: The invention concerns a method of visualising an internal hollow organ (3) of a subject based on a volumetric scan thereof. A number of three-dimensional images of the internal surface of the hollow organ are reconstructed. For each image an image (L_i) is calculated for the left eye from a first view point l_i . Next an image for the right eye (R_i) is calculated from a second view point r_i that differs from the first view point. The left eye image and the right eye image are combined into a pair (L_i, R_i) to form a stereoscopic image that is shown using stereoscopic imager means. The invention also refers to a system and a computer program to carry out the method according to the invention.

WO 03/083781 A1

Method, system and computer program for stereoscopic viewing of 3D medical images

The invention refers to a method of visualising an internal hollow organ of a subject based on a volumetric scan thereof, said method comprising the step of: a) Reconstructing a three-dimensional image of the inside of the hollow organ.

Such a method is known in the art and forms the basis for a number of
5 computer programs designed by different experts in the field providing a virtual medical examination technique called "virtual endoscopy". Based on a volumetric scan of a patient, for instance generated by means of Computed Tomography, a data model is created from which three-dimensional endoscopic images are reconstructed by means of known three-dimensional reconstruction techniques. A 3D path is defined through a tubular structure or
10 hollow organ of interest after which the inside thereof is visualised by moving a virtual camera along this path and calculating 3D endoscopic images as seen from view points lying on the path. Such computer programs offer a medically skilled person an opportunity to examine the internal organs of the patient without the need for invasive examination like true endoscopy. The thus reconstructed 3D endoscopic images can for instance be evaluated on a
15 computer by a medically skilled person for diagnosis.

The known method has the disadvantage that although the resulting 3D images are a true representation of the inner structure of the hollow organ the interpretation thereof remains difficult. In practice it appears for instance to be difficult for a user to keep track of the orientation of the virtual camera during interactive movement thereof. Furthermore the
20 wide-angle view of the lens of the virtual camera appears unnatural to a human observer and thus hampers the interpretation.

It is an object of the method according to the invention to provide a method of the type as described above that provides a more natural view.

The method according to the invention is therefore characterised in that for
25 each image the method comprises a number of technical measures described in the following steps of: b) Calculating an image for the left eye from a first view point; c) Calculating an image for the right eye from a second view point that differs from the first view point; d) Combining the left eye image and the right eye image into a pair to form a stereoscopic image; and e) Showing the stereoscopic image using stereoscopic imager means.

By providing stereoscopic images of the hollow organ instead of monoscopic images the user sees the images in a more natural way. Stereoscopic images provide additional information, such as depth information and height information of the images. Using this information the user is for instance able to better judge relations between objects and/or to clearly see curvatures and/or height differences allowing him or her to distinguish between flat or inclining areas. As a result thereof the observer will be able to interpret the patient data more accurately and has a greater chance of arriving at the correct diagnosis.

It is noted that steps b) through d) refer to the generation of stereoscopic images, which is known per se in the field of computer graphics. A method of this type is for instance described in US patent 6,011,581. Contrary to the method according to the invention the known method is however not part of a method for performing virtual inspection of an internal hollow organ of a subject based on a volumetric scan thereof, such as virtual endoscopy.

In a first preferred embodiment of the method according to the invention, wherein step a) further comprises the step of: Defining a view path through the hollow organ, the method is Characterised in that, for each image the first view point lies on a first line and the second view point lies on a second line, which first and second lines extend essentially parallel to the view path, each on one side thereof. The user now follows the same path through the hollow organ as during performance of virtual endoscopy in the known “monoscopic mode”, but sees the 3D images in a more natural stereoscopic view. In support of this embodiment the image for each viewpoint needs to be calculated separately.

In a second preferred embodiment of the method according to the invention, wherein step a) further comprises the steps of: Defining a view path through the hollow organ; and Reconstructing the images as seen from view points lying on the view path, the method is characterised in that, at least the first or the second view point lies on the view path. The amount of images to be calculated is equal to the amount of images necessary for the first embodiment. However, when the stereoscopic viewing technique is used in addition to the known monoscopic viewing technique, advantageously, for each stereoscopic pair only one additional image needs to be calculated. The monoscopic images for view points on the view path that are already calculated for the known monoscopic viewing technique can now be used as either the left or the right eye image of a stereoscopic pair. Hereby the overhead computations necessary to implement the method according to the invention are thus effectively minimised.

In a third preferred embodiment of the method according to the invention, wherein step a) further comprises the steps of: Defining a view path through the hollow organ; and Reconstructing the images as seen from view points lying on the view path, the method is characterised in that, both the first and second view point lie on the view path. By
5 choosing the first and second viewpoint cleverly now effectively in this third preferred embodiment the number of images to be calculated is equal to the number of images to be calculated for the known monoscopic method. The method according to the invention may also be implemented in addition to the known monoscopic method without any necessary overhead computations. Use can then be made of images that are already calculated for
10 viewpoints on the view path for the known monoscopic method. The already calculated images for viewpoints on the path are most efficiently alternately used as first or second viewpoint.

In a further preferred embodiment of the method according to the invention the distance between the first and the second viewpoint is essentially one or more
15 millimetres. The resulting view appears to be most natural for a human observer.

Preferably the view direction in the first and the second viewpoint is essentially parallel. Again the objective thereof is to simulate the normal view of a human observer, thus facilitating a correct interpretation of the imaged data, which in turn will greatly enhance the chance that the correct diagnosis is made.

20 According to another preferred embodiment of the method according to the invention step e) further comprises the steps of: showing the left and right eye image forming a stereoscopic image with different modification; and arranging the stereoscopic imager means such that the left eye image is passed to the left eye and the right eye image is passed to the right eye. Different modification of the left and right eye images in combination with
25 suitable stereoscopic imager means is a practical way to accomplish stereoscopic vision. Various techniques hereof are known per se in the relevant art. In a first detailed embodiment use is made of so-called "passive" stereoscopic imager means. The left and right eye image of a stereoscopic image is shown with different polarization; and the stereoscopic imager means are provided with correspondingly differently polarized viewing means for
30 respectively the left and right eye. In a second detailed embodiment the left and right eye image of a stereoscopic image are shown with different time-multiplexation. So-called "active" stereoscopic imager means are used with different viewing means for the left and right eye that are to be activated separately by a control unit based on corresponding time-

multiplexation signals. In order to provide a geometrically correct image the viewing means are preferably incorporated in a head-mountable display.

According to another preferred embodiment of the method according to the invention the stereoscopic imager means comprise a lenticular screen. Lenticular screens are known per se in the relevant art. Advantageously these screens are able to show a stereoscopic image as such without the need for an observer to use or wear any assisting means.

The invention also refers to a system for visualising an internal hollow organ of a subject based on a volumetric scan thereof, which system comprises means for carrying out the steps of the method according to the invention.

The invention further refers to a computer program to carry out the method according to the invention.

The invention will be further explained by means of the attached drawing, in which:

Figure 1 shows a flow diagram presenting an overview of the steps of the method according to the invention;

Figure 2 shows an example of a monoscopic image as part of a simulated endoscopic view according to the state of the art;

Figure 3 schematically illustrates a first preferred embodiment of the method according to the invention;

Figure 4 schematically illustrates a second preferred embodiment of the method according to the invention; and

Figure 5 schematically illustrates a third preferred embodiment of the method according to the invention.

In all figures equal objects are denoted with equal reference numerals.

In general the method according to the invention refers to virtual inspection techniques for examination, for instance medical examination, of a subject which is usually a human patient, but can also for instance be an animal. Said techniques allow an inner view of hollow structures of the subject, e.g. organs, blood vessels, etc., by means of computer graphics. A virtual camera is placed in a three-dimensional data volume representing (part of)

the subject. The method according to the invention will now be described according to a preferred embodiment, which relates to virtual endoscopy performed on the colon of a human patient.

In order to require the 3D patient data several known medical examination techniques can be used to acquire a volumetric scan, such as Computed Tomography (CT) or Magnetic Resonance Tomography (MR). The 3D data are visualised by means of known three-dimensional reconstruction techniques. For this purpose different suitable volume rendering techniques are known in the field of computer graphics. Preferably use is made of iso-surface volume rendering techniques, which are for instance described in the article "Iso-surface volume rendering", by M.K. et al., Proc. of SPIE Medical Imaging '98, vol. 3335, pp 10-19. Thus a virtual environment is created that simulates endoscopy.

Figure 1 shows a flow diagram presenting an overview of the steps of the method according to the invention. All of the steps will be separately discussed below.

15 Method steps

Step 10: Reconstructing a number of three-dimensional images of the internal surface of the hollow organ;

A variety of visualisation techniques are available to the person skilled in the art to simulate a three-dimensional view of the colon through which a user may navigate.

20 Several examples include:

- a) the "unfolded cube" technique, wherein from each view point six views of the colon wall are calculated in mutually perpendicular directions, which views are projected onto the walls of a cube, which is next unfolded to provide a natural view of the colon; and
- b) the "view point" technique, wherein from each view point one view in one direction is calculated as in real endoscopy;
- 25 c) the "stretched path" technique, wherein the colon wall is projected onto the walls of a cylinder, which is next unfolded and stretched.

All techniques result in a segmentation of the colon based on a voxel model comprising the data of a volumetric scan that is projected on a flat surface and represented as a surface model. Although the images created by means of virtual endoscopy are in the relevant field usually referred to as three-dimensional (3D) images, they are in fact more accurately described as the image of a two-dimensional projection of a 3D structure on a surface. Throughout this text these images will be referred to as 3D images.

The view point technique is a classical technique that is known in the art and among others described by Rogalla P, Terwisscha van Scheltinga J, Hamm B (Eds) in "Virtual endoscopy and related 3D techniques", Berlin, Springer Verlag (2001). This book is part of the series Medical Radiology Diagnostic Imaging edited by: Baert AL, Sartor K, en Youker JE.

The stretched path technique is in more detail described in the following article by D.S. Paik, C.F. Beaulieu, R.B. Jeffrey, Jr., C.A. Karadi, S. Napel, "Visualization Modes for CT Colonography using Cylindrical and Planar Map Projections." J Comput Assist Tomogr 24(2), pages 179-88, 2000.

The unfolded cube technique is in more detail described in the article "Quicktime VR- an image based approach to virtual environment navigation", by S.E. Chen, SIGGRAPH 95, held on 6-11 August 1995, Los Angeles, California, USA, Conference Proceedings, Annual Conference Series, pages 29-38. A medical application of the unfolded cube technique is described in the following publication by F. Vos, I. Serlie, R. van Gelder, F. Post, R. Truyen, F. Gerritsen, J. Stoker, and A. Vossepoel, "A New Visualization Method for Virtual Colonoscopy", in *Medical Image Computing and Computer-Assisted Intervention - MICCAI 2001* (W. J. Niessen and M. A. Viergever, eds.), pp. 645--654, Springer-Verlag, October 2001.

According to the unfolded cube technique two-dimensional images resulting from the rendering techniques mentioned above are projected or mapped onto a plane or the sides of an object. The object is next unfolded in two-dimensions and stored. The resulting stored two-dimensional unfolded object image simulates a three-dimensional view from a viewpoint from within the object.

Various different objects can be used to map the environment on, such as a cube, a sphere, a cylinder, etc. Suitable projecting or mapping techniques are known per se in the field of computer graphics. The two-dimensional unfolded object images can be stored in different formats, for instance a general format, such as jpeg or a specific format, such as a Quicktime VR-format. The resulting two-dimensional unfolded object images comprise a lot of information, but are suitable for display on a low-end computer.

An example of a stored two-dimensional unfolded object image resulting from the above projecting is shown in figure 2. Image 1 shows the inner colon wall of a patient. As can be clearly seen the originally two-dimensional images simulating the three-dimensional view are mapped on the sides of a cube 2, which is then folded open in two dimensions. The

six sides of the cube are denoted as front (F), left (L), right (R), back (B), up (U) and down (D). This way the user is given an intuitive representation of the originally 3D information.

An image as shown in figure 2 can be calculated for a number of view points lying on a view path that is defined through the colon by means of known techniques.

- 5 Preferably the calculated two-dimensional images are displayed in a sequence. This way the reviewer is given the impression to be immersed in the three-dimensional environment as if he or she could "fly through it". A virtual environment based on the stored two-dimensional images can be calculated at one or more viewpoints in the three-dimensional view allowing interactive inspection of the virtual environment. This embodiment provides the user the
- 10 possibility to dynamically inspect the environment of a viewpoint interactively.

However the image 1 according to the state of the art is a monoscopic image. According to the method of the invention stereoscopic images are calculated and shown thus providing the human observer a natural impression of the patient data including all relevant geometrical information, such as depth and height information.

- 15 The method according to the invention thus comprises for each image the following technical measures as described in steps 20 through 50. Three different preferred embodiments of the method according to the invention are illustrated in figures 3 through 5. All three figures show a picture of a colon 3 wherein a view path 4 is defined using known techniques. View points m_i (for $i=1 \dots n$, wherein n is the number of view points) represent
- 20 positions on the view path for which monoscopic images M_i are generated according to the method of the state of the art. Viewpoints l_i and r_i are positions for generating left and right eye images L_i and R_i to form a stereoscopic image according to the method of the invention.
- Step 20: Calculating an image for the left eye from a first viewpoint.*

- As mentioned above several techniques are known in the field to calculate a
- 25 three-dimensional monoscopic image L_i from a first viewpoint l_i that is suitable for the left eye. When using the unfolded cube technique an image like image 1 can for instance be used as left eye image.

Step 30: Calculating an image for the right eye from a second viewpoint that differs from the first viewpoint.

- 30 Once a method is chosen to calculate a monoscopic left eye image L_i , the same method will be used to calculate a three-dimensional monoscopic right eye image R_i . The right eye image is to be calculated from a second view point r_i that differs from the first view point l_i .

In order to create a natural view the view direction from both viewpoints l_i , r_i preferably is essentially parallel. However an image pair may also be calculated with converging view directions, in which case image distortions are created.

For the distance between both view points preferably the general rule applies
5 that the distance between the view points should be approximately 1/30 part of the distance from the view points to the object(s) to be visualised, for instance the colon wall. In practice this leads to a preferred distance between the view points of one or more millimetres that may lie in the range of 1 – 5 millimetres, and more preferably in the range of 2 - 3 millimetres. General information about stereoscopic imaging can be found in: *Jacobus G. Ferwerda, "The*
10 *World of 3-D, A Practical Guide to Stereo Photography", 1982.*

Several approaches can be chosen to define the first and second view points l_i , r_i , which will be discussed below as part of three preferred embodiments.

Step 40: Combining the left eye image and the right eye image into a pair to form a stereoscopic image

15 Figure 3 schematically illustrates a first preferred embodiment of the method according to the invention. According to this first preferred embodiment for each stereoscopic image (L_i , R_i) the first view point l_i lies left of the view path 4 and the second view point r_i lies right of the view path 4. Preferably the first viewpoint l_i lies on a first line (not shown) that essentially follows the view path at a certain distance. Preferably the second
20 view point r_i lies on a second line (not shown) that essentially follows the view path at a certain distance. The first and second lines preferably lie on different sides of the view path. According to this embodiment two new monoscopic images L_i and R_i need to be generated for two view points l_i and r_i following the view path 4 to create a stereoscopic image (L_i , R_i) instead of one monoscopic image M_i for view points m_i on the view path 4 according to the
25 known method.

Figure 4 schematically illustrates a second preferred embodiment of the method according to the invention. For each stereoscopic image at least the first viewpoint l_i or the second view point r_i lies on the view path 4. In figure 4 the first view point l_i lies on the view path 4 and the second view point r_i lies right of the view path 4. The first viewpoint l_i
30 is now equal to the viewpoint m_i (see figure 3) for the method according to the state of the art. Preferably the second view point r_i lies on a line that essentially follows the view path 4 at a certain distance. According to this embodiment two monoscopic images L_i and R_i need to be generated for two view points l_i and r_i , lying respectively on and next to the view path 4, to create a stereoscopic image (L_i , R_i). In case the stereoscopic viewing technique is used in

addition to the known monoscopic viewing technique the already calculated monoscopic images M_i for view points m_i lying on the view path can be efficiently used as either the left or the right eye images in each stereoscopic image.

Figure 5 schematically illustrates a third preferred embodiment of the method according to the invention, wherein for each stereoscopic image (L_i, R_i) both the first view point l_i and the second view point r_i lie on the view path 4. The resulting stereoscopic image provides a side view perpendicular to the direction of the view path 4. In case the stereoscopic viewing technique is used in addition to a known monoscopic viewing technique wherein monoscopic side view images M_i are already calculated for view points m_i lying on the view path, these can be efficiently used as both the left and the right eye images in each stereoscopic image. In figure 5 a number of corresponding pairs of viewpoints are indicated (l_i, r_i) and (l_{i-1}, r_{i-1}) where $r_i = l_{i-1}$ and $r_{i-1} = l_{i-2}$. This applies for instance to the unfolded cube technique, discussed above, comprising four side views, respectively, L, R, U and D. The amount of images to be calculated is now equal to the amount of images to be calculated for the known monoscopic viewing technique.

Step 50: Showing the stereoscopic image using stereoscopic imager means.

Once the stereoscopic images are generated they now need to be shown to the observer. Generally this is performed by the following two steps: Showing the left and right eye image forming a stereoscopic image with different modification; and Arranging the stereoscopic imager means such that the left eye image is passed to the left eye and the right eye image is passed to the right eye.

In the field of computer graphics different techniques to accomplish this type of modification are available. Some of them will be discussed below.

Firstly the modification can be accomplished by alternately showing the left and right eye image of a stereoscopic image with different polarization. A human observer may then view the images using stereoscopic imager means that are provided with correspondingly differently polarized viewing means for respectively the left and right eye. In practice the left and right eye images can for instance be alternately shown on a screen at high frequency, while the observer for instance wears polarized glasses.

Secondly the modification can be accomplished by showing the left and right eye image of a stereoscopic image with different time-multiplexation. The stereoscopic imager means then need to be provided with different viewing means for the left and right eye, that are to be activated separately by a control unit based on corresponding time-

multiplexation signals. For this purpose an LCD shutter may be used that is controlled by a computer using infrared signals.

Preferably the stereoscopic images are viewed under the same or like conditions under which the stereoscopic images were calculated or recorded. In this respect the viewing angle and perspective are relevant. By incorporating the viewing means in a head-mountable display a geometrically correct presentation of the stereoscopic images can be assured

Thirdly, as an alternative to the first and second showing techniques the stereoscopic imager means may comprise a lenticular screen. Lenticular screens comprise an array of cylindrically shaped lenses that are able to show a stereoscopic image directly without the need for any viewing means to be worn by the observer. Lenticular screens are known per se in the art and are for instance described in American Patents US6064424 en US6118584, both by the same present applicant.

It is noted that throughout this text the words left eye and right eye are interchangeable.

The method according to the invention is preferably carried out by a system for visualising an internal hollow organ of a subject based on a volumetric scan thereof, which systems comprises means for carrying out the steps of the method according to the invention. Said means preferably comprise a computer program. Based on the explanation given herein a skilled person will be able to translate the steps of the method into such a computer program to carry out the method.

The system described can be directly coupled to the data acquisition system for acquiring the data of the subject concerned. This data set can be acquired by means of various techniques, such as 3D X-ray rotational angiography, computed tomography, magnetic resonance imaging or magnetic resonance angiography.

Summarising the invention refers to a method of performing virtual inspection, such as virtual endoscopy, by showing 3D patient data by means of stereoscopic images in order to reveal more detail thereof. The method is especially developed for use in a medical environment to increase the accuracy of inspection and thus the accuracy of patient diagnosis. Application of this method results in a virtual image yielding medical information, that can be used as an alternative to invasive methods, such as colonoscopy and bronchoscopy.

The invention is of course not limited to the described or shown embodiment. The method may be used to visualise surface details of other medical objects, such as blood vessels or trachea, and may even be used outside the field of medicine. The invention

therefore generally extends to any embodiment, which falls within the scope of the appended claims as seen in light of the foregoing description and drawings.

CLAIMS:

1. A method of visualising an internal hollow organ of a subject based on a volumetric scan thereof, said method comprising the step of:

a) Reconstructing a number of three-dimensional images (1) of the internal surface of the hollow organ (3);

5 characterised in that for each image the method comprises the steps of:

b) Calculating an image (L_i) for the left eye from a first view point (l_i);

c) Calculating an image (R_i) for the right eye from a second view point (r_i) that differs from the first view point;

10 d) Combining the left eye image and the right eye image into a pair (L_i, R_i) to form a stereoscopic image; and

e) Showing the stereoscopic image using stereoscopic imager means.

2. Method according to claim 1, wherein step a) further comprises the steps of:

I. Defining a view path (4) through the hollow organ (3); and

15 II. Reconstructing the images as seen from view points lying on the view path, characterised in that, at least the first (l_i) or the second view point (r_i) lies on the view path.

3. Method according to claim 1, wherein step a) further comprises the steps of:

I. Defining a view path (4) through the hollow organ (3); and

20 II. Reconstructing the images as seen from view points lying on the view path, characterised in that, both the first (l_i) and second view point (r_i) lie on the view path.

4. Method according to claim 3, wherein view points on the view path (4) are alternately used as first (l_i) or second view point (r_i).

25

5. Method according to claim 1, wherein step a) further comprises the steps of:

I. Defining a view path (4) through the hollow organ (3), the method being

characterised in that, for each image the first view point (l_i) lies on a first line and the second view point (r_i) lies on a second line, which first and second lines extend essentially parallel to the view path at a certain mutual distance.

- 5 6. Method according to one or more of the preceding claims, wherein the distance between the first (l_i) and the second viewpoint (r_i) is essentially one or more millimetres.
7. Method according to one or more of the preceding claims, wherein the view
10 direction in the first (l_i) and the second view point (r_i) is essentially parallel.
8. Method according to one or more of the preceding claims, wherein step e) further comprises the steps of:
 - 15 I. Showing the left (L_i) and right eye image (R_i) forming a stereoscopic image (L_i , R_i) with different modification; and
 - II. Arranging the stereoscopic imager means such that the left eye image is passed to the left eye and the right eye image is passed to the right eye.
9. Method according to claim 8, wherein step I comprises the step of:
20 Alternately showing the left (L_i) and right eye image (R_i) of a stereoscopic image (L_i , R_i) with different polarization; and wherein step II comprises the step of:
Providing the stereoscopic imager means with correspondingly differently polarized viewing means for respectively the left and right eye.
- 25 10. Method according to claim 8, wherein step I comprises the step of:
Showing the left (L_i) and right eye image (R_i) of a stereoscopic image (L_i , R_i) with different time-multiplexation, and wherein step II comprises the step of:
Providing the stereoscopic imager means with different viewing means for the
left and right eye that are to be activated separately by a control unit based on corresponding
30 time-multiplexation signals.
11. Method according to claim 9 or 10, wherein the viewing means are incorporated in a head-mountable display.

12. Method according to one or more of the preceding claims 1 through 8, wherein the stereoscopic imager means comprise a lenticular screen.

13. A system for visualising an internal hollow organ of a subject based on a volumetric scan thereof, which systems comprises means for carrying out the steps of the method according to one or more of the preceding claims.

14. Computer program to carry out the method according one or more of the preceding claims 1 through 12.

1/3

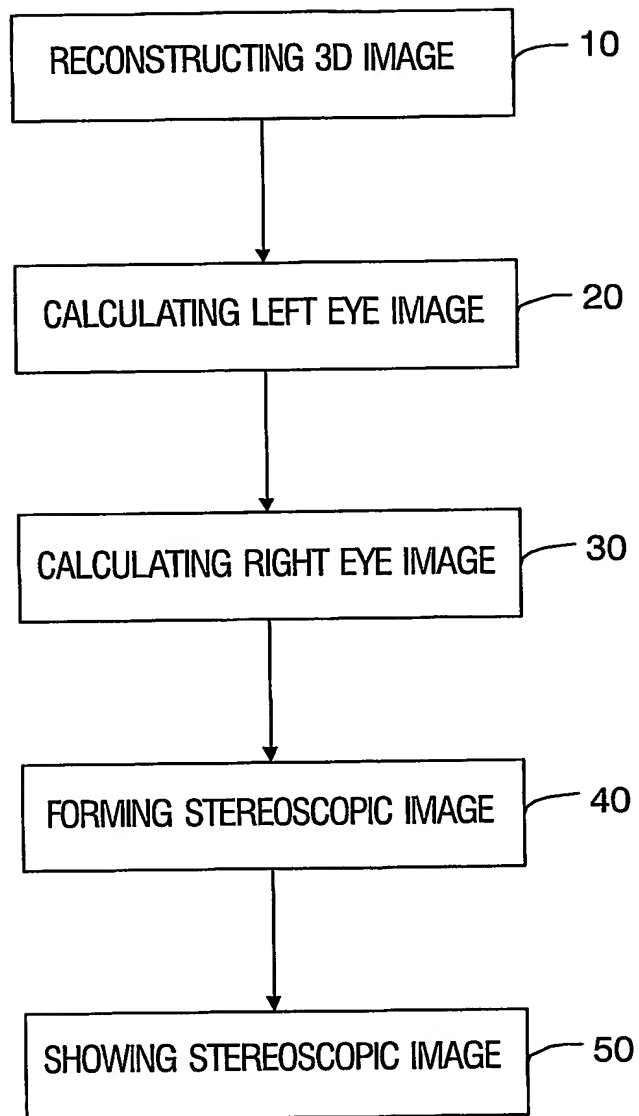


FIG.1

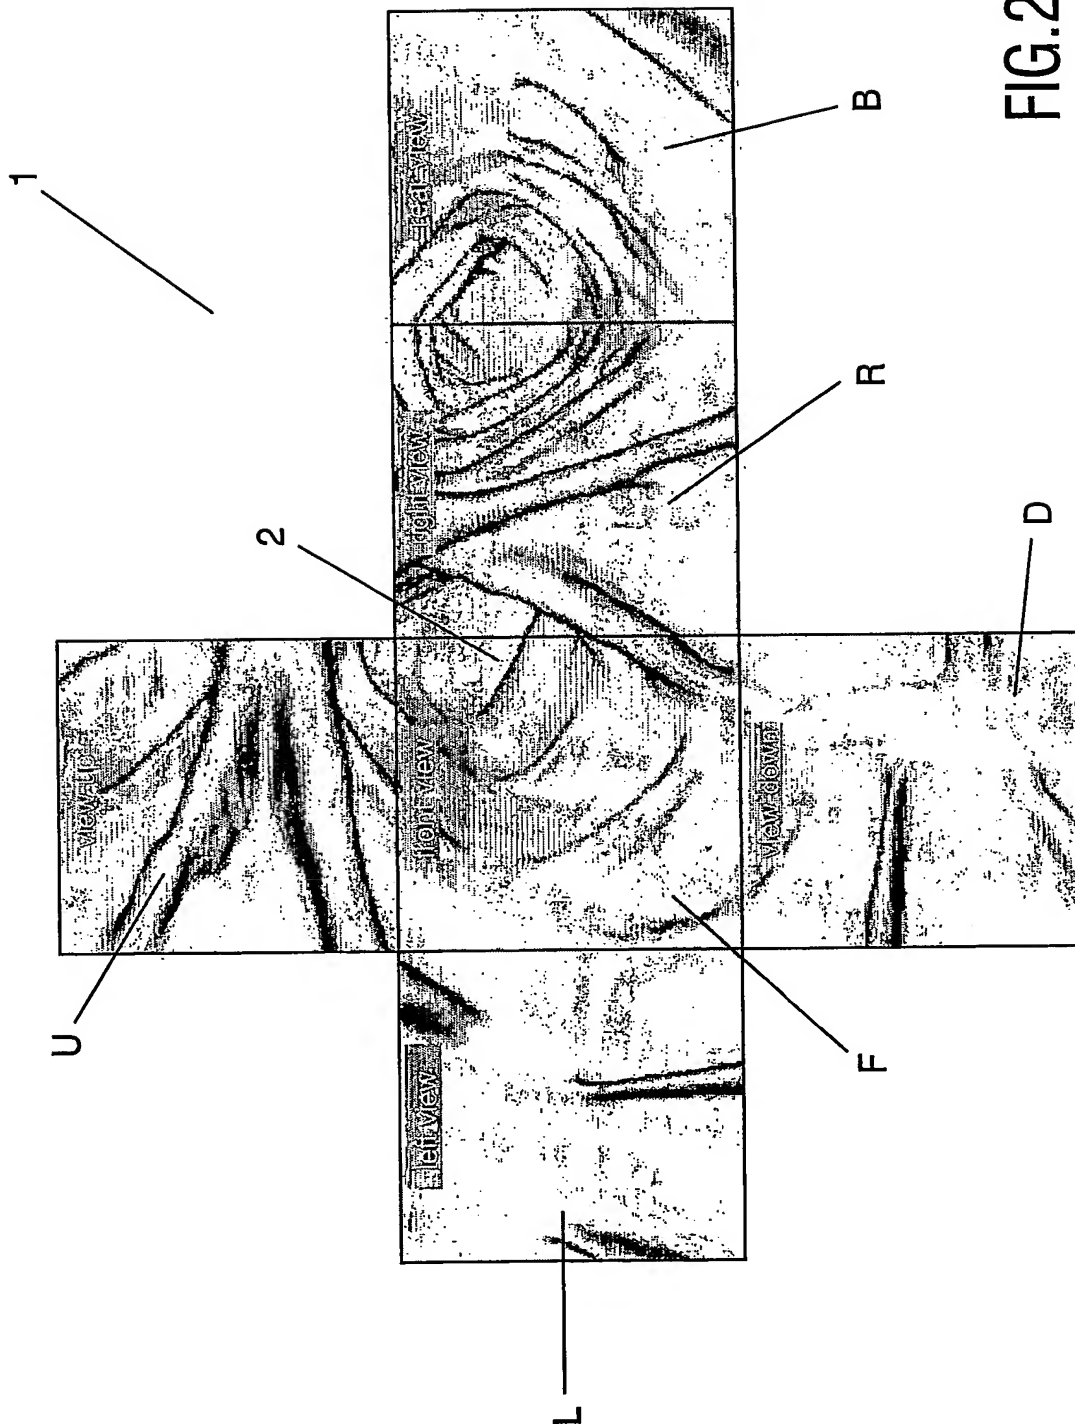


FIG. 2

3/3

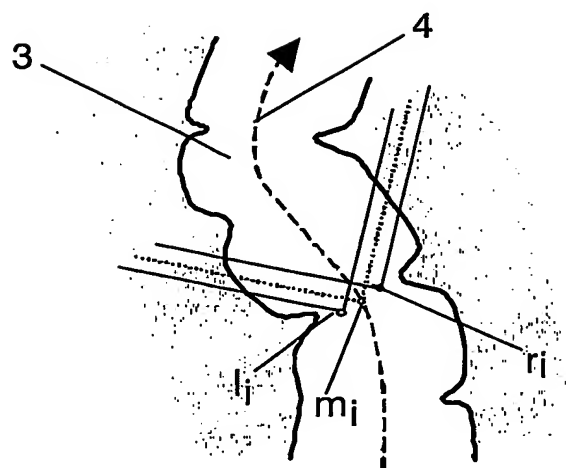


FIG.3

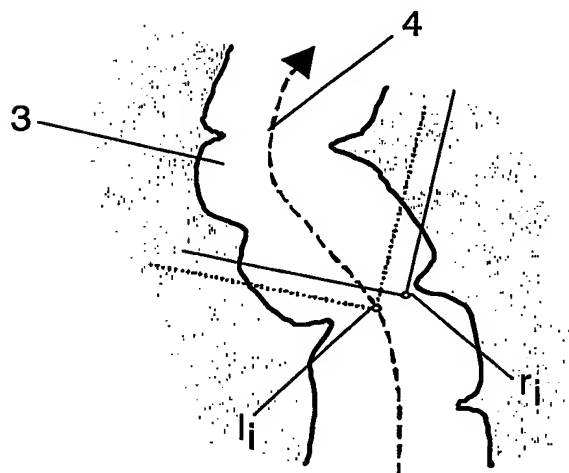


FIG.4

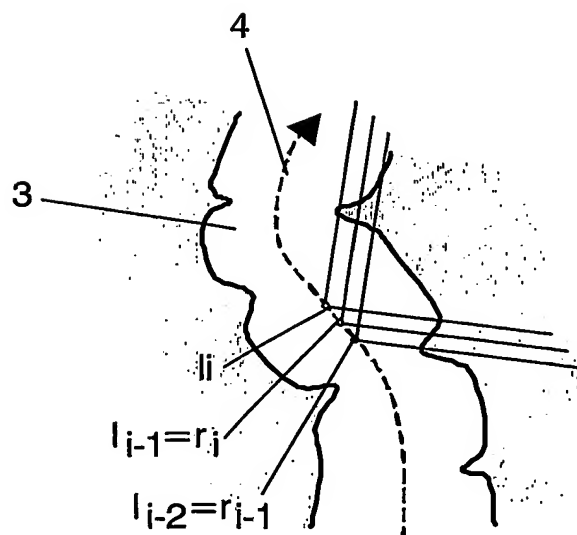


FIG.5

INTERNATIONAL SEARCH REPORT

 International Application No
 PCT/IL/01216

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06T15/00 G09B23/28 A61B19/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06T G09B A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 611 025 A (LORENSEN WILLIAM E ET AL) 11 March 1997 (1997-03-11) column 1, line 65 -column 2, line 11 column 2, line 60 -column 3, line 2 column 4, line 39 -column 5, line 15 column 5, line 30 - line 34 claims 1,5 ---	1-14
X	US 5 953 013 A (SHIMIZU KUNIAKI) 14 September 1999 (1999-09-14) column 2, line 8 -column 4, line 27 column 13, line 7 - line 46 column 16, line 51 -column 17, line 41; figure 16 --- -/--	1-14

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 July 2003

Date of mailing of the international search report

08/07/2003

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Abraham, V

INTERNATIONAL SEARCH REPORT

Intel lional Application No

PCT/I 3/01216

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 283 763 B1 (MATSUZAKI HIROSHI ET AL) 4 September 2001 (2001-09-04) column 1, line 63 -column 2, line 62 column 5, line 14 - line 17 ---	1,6-14
X	WO 99 26534 A (BURDETTE MEDICAL SYSTEMS INC) 3 June 1999 (1999-06-03) page 4, line 36 -page 5, line 16 ---	1,6-14
A	US 6 011 581 A (FARIS SADEG M ET AL) 4 January 2000 (2000-01-04) cited in the application column 2, line 57 -column 4, line 2 ---	1-14
A	US 6 331 116 B1 (CHEN DONGQUING ET AL) 18 December 2001 (2001-12-18) column 2, line 45 -column 3, line 67 ---	1-5,13, 14
A	US 6 272 366 B1 (VINING DAVID J) 7 August 2001 (2001-08-07) column 2, line 27 -column 3, line 63 ---	1,13,14
A	US 6 118 584 A (VAN BERKEL CORNELIS ET AL) 12 September 2000 (2000-09-12) cited in the application abstract -----	12

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP01/01216

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5611025	A	11-03-1997	CN 1135047 A ,B DE 19543410 A1 IL 116011 A JP 8252217 A	06-11-1996 27-06-1996 09-05-1999 01-10-1996
US 5953013	A	14-09-1999	JP 7210704 A JP 7296184 A JP 8016813 A US 5694530 A US 5900878 A	11-08-1995 10-11-1995 19-01-1996 02-12-1997 04-05-1999
US 6283763	B1	04-09-2001	JP 11161813 A	18-06-1999
WO 9926534	A	03-06-1999	US 6256529 B1 AU 1596999 A CA 2311319 A1 EP 1033934 A1 US 6129670 A WO 9926534 A1 US 6512942 B1 US 2001041838 A1	03-07-2001 15-06-1999 03-06-1999 13-09-2000 10-10-2000 03-06-1999 28-01-2003 15-11-2001
US 6011581	A	04-01-2000	US 5502481 A US 5537144 A US 5553203 A AU 4901796 A WO 9622660 A1 AU 4159796 A US 6002518 A WO 9615632 A1 US 6456432 B1 US 6556236 B1 US 6034717 A US 5821989 A US 6104447 A US 5828427 A US 5886816 A US 6359664 B1 US 6188460 B1 US 5844717 A	26-03-1996 16-07-1996 03-09-1996 07-08-1996 25-07-1996 06-06-1996 14-12-1999 23-05-1996 24-09-2002 29-04-2003 07-03-2000 13-10-1998 15-08-2000 27-10-1998 23-03-1999 19-03-2002 13-02-2001 01-12-1998
US 6331116	B1	18-12-2001	US 5971767 A AU 3901700 A AU 3901800 A BR 0009098 A BR 0009099 A CA 2368058 A1 CA 2368390 A1 CN 1350681 T CN 1352781 T EP 1161741 A1 EP 1173830 A2 JP 2002538915 T JP 2002539568 T WO 0055812 A1 WO 0055814 A2 US 6343936 B1 US 2001031920 A1	26-10-1999 04-10-2000 04-10-2000 28-05-2002 25-02-2003 21-09-2000 21-09-2000 22-05-2002 05-06-2002 12-12-2001 23-01-2002 19-11-2002 19-11-2002 21-09-2000 21-09-2000 05-02-2002 18-10-2001

INTERNATIONAL SEARCH REPORT

International Application No

PCT/JP01/01216

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6331116	B1	US 2002045153 A1	18-04-2002
		US 2002039400 A1	04-04-2002
		AU 734557 B2	14-06-2001
		AU 4267897 A	02-04-1998
		CN 1230271 A	29-09-1999
		EP 1012812 A1	28-06-2000
		IL 128884 A	10-03-2002
		JP 2001502197 T	20-02-2001
		KR 2000036177 A	26-06-2000
		WO 9811524 A1	19-03-1998
US 6272366	B1 07-08-2001	US 5782762 A	21-07-1998
		US 2001044576 A1	22-11-2001
		AU 706280 B2	10-06-1999
		AU 4138096 A	23-05-1996
		CA 2202401 A1	09-05-1996
		EP 0794728 A1	17-09-1997
		JP 10507954 T	04-08-1998
		WO 9613207 A1	09-05-1996
		US 2002193687 A1	19-12-2002
		US 6366800 B1	02-04-2002
		US 5920319 A	06-07-1999
		US 6083162 A	04-07-2000
US 6118584	A 12-09-2000	DE 69616006 D1	22-11-2001
		DE 69616006 T2	06-06-2002
		EP 0783825 A2	16-07-1997
		WO 9702709 A2	23-01-1997
		JP 10505689 T	02-06-1998